




3C

WINTER FLYING

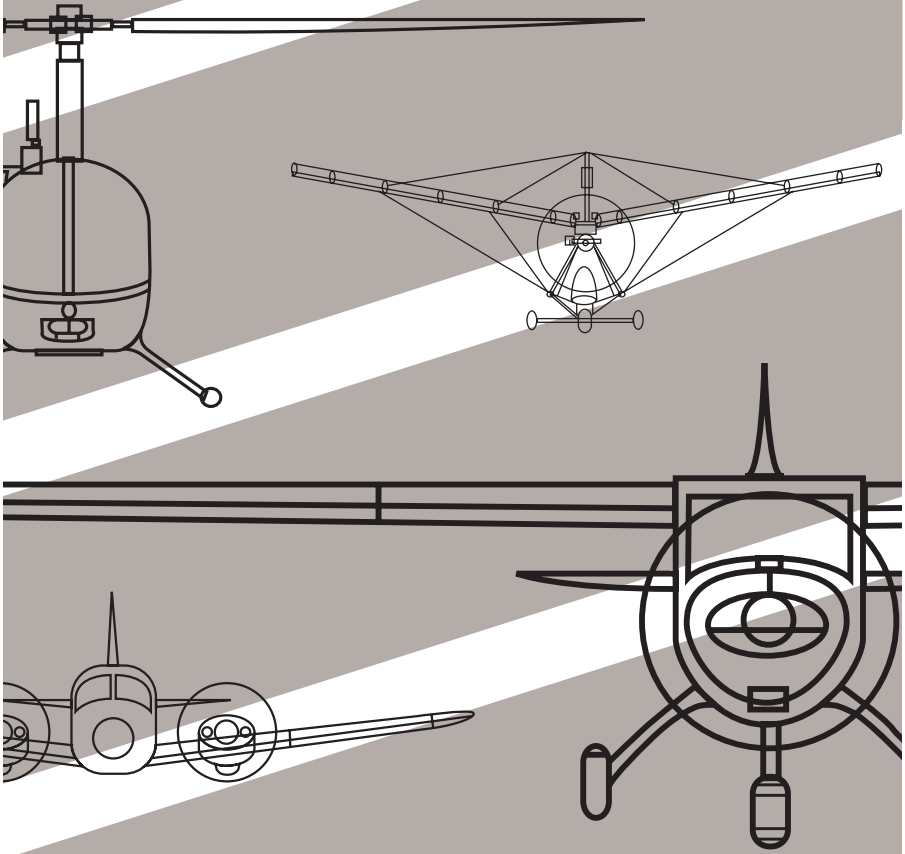

WINTER FLYING



1 INTRODUCTION

The purpose of this leaflet is to advise pilots/operators of aeroplanes, helicopters and microlights of some of the problems they may encounter while flying in winter.

2 AIRCRAFT PREPARATION

a During the pleasant days of summer, items of equipment may have 'disappeared'. Make sure the aircraft has serviceable pitot head covers, static vent plugs, control surface locks and, if parked outside, proper tie-downs. Having made sure you have got them – use them.

b Some engines may need the aircraft manufacturer's approved winter cooling restrictor to allow the oil and cylinders to reach and maintain correct operating temperatures. After fitting, keep an

eye on the oil temperature/ cylinder head temperature, especially if the weather turns warmer.

c The grade of engine oil may need to be changed when operating in colder conditions. Consult the Manufacturers Manual or Maintenance Organisation.

d Check that the cabin heater/ demister is working properly before you really need to use it. A faulty cabin heater, either combustion or exhaust, can allow exhaust gases, including carbon monoxide, into the cabin. If in doubt, have the heater pressure-tested (see *Airworthiness Notices Nos. 40 and 47*). Carbon monoxide is colourless, odourless, tasteless, insidious in its effects and **lethal**. One of the first symptoms may be a severe headache, drowsiness or dizziness.

e 'Spot' type carbon monoxide detectors only have a limited life when unwrapped. Use a 'fresh' one and read the instructions.

f The pitot-static system should be checked for water which can freeze and block the system. If static drains are fitted, know where they are and how to use them.

g The battery is worked harder in winter, so make sure it is in good condition and well charged. If you've had to make prolonged attempts to start the engine, when it does start allow plenty of time for the battery to re-charge before using heavy electrical loads. In a single-engined aircraft it's all you are left with if the electrical charging system fails in flight.

h Some aircraft require the addition of Iso-propyl alcohol in the fuel for operation in low ambient temperatures. (See Flight Manual and, in the case of the Cessna 300/400 series, see *Airworthiness Notice No. 8*.)

i Check that all the airframe, propeller and windscreen systems are operating correctly. De-icing systems suffer from neglect and may prove faulty when required. Leaks may have developed in inflatable boots especially on the tailplane (due to stones thrown up by the landing gear/propellers), so check that they **ALL** inflate properly.

j Make sure engine crankcase oil breather pipes are clear and free from deposits which can freeze, causing a pressure build-up that could force engine oil seals out of their housings.

k Control cable tensions may need to be adjusted.

3 FLIGHT PREPARATION

a If you are planning to visit another aerodrome, make sure it is

open as mud, snow, flooding or frozen ruts may have necessitated closure. Remember also that daylight and airport operating hours are much shorter in winter.

b **Never** fly in icing conditions for which the aircraft is not cleared. Do not be misled into thinking that because an aircraft is fitted with de-icing, or anti-icing, equipment, it is necessarily effective in **all** conditions. Most general aviation aeroplanes are **not** cleared for flight in icing conditions, although some protection may be given. Those cleared are generally cleared **only** for flight in *light* icing conditions (the equivalent of a build-up of 12 mm (1/2 inch) of ice in 40 nautical miles). General aviation helicopters are **not** cleared. (See Pilots' Operating Handbooks, Flight Manuals, etc.)

c Continued flight into bad weather is the number one killer in UK general aviation. Get an up to date **aviation** weather forecast. The current 'GET MET' card explains how (copies available from Safety Promotion Section, please send SAE).

d The most likely temperature range for **airframe** icing is from 0 to -10°C; it rarely occurs at -20°C or colder (see para 6(c) for carburettor icing conditions). Pay attention to any icing warnings. Note the freezing level, it can be surprisingly low even in Spring and Autumn; you may need to descend below it to melt an ice build-up; but **beware of high ground**. Remember also that altimeters over-read in very low air temperatures, by as much as several hundred feet. You can be lower than you think.

e If you are likely to encounter ice en-route, have you room to descend to warmer air? Will the airspace or performance allow you to climb to cold, clear air? (Note that any ice build up may not melt and will

degrade cruise performance). Can you land safely at your destination? If the answers to these questions are NO, **don't go**.

f Prepare an accurate route plan with time markers, including an alternative in case you do encounter ice/snow. The countryside looks very different when covered by a blanket of snow and familiar landmarks may have disappeared.

g Wet snow, slush or mud can seriously lengthen the take-off run or prevent take-off altogether. Check the Flight Manual and Safety Sense Leaflet 7B 'Aeroplane Performance', and **allow a generous safety margin** especially from grass.

h Have a cloth handy for de-misting the inside of the windows while taxiing.

i Dress sensibly, (you should spend some time outside whilst pre-flighting the aircraft), and have additional warm clothing available in case of heater failure or a forced landing.

j Some parts of the UK will be pretty inhospitable in winter (eg much of Wales and Scotland) so, if you are in a single-engined aircraft, file a flight plan and carry a few survival items in case of a forced landing, eg warm clothing, silvered survival bag, torch/ mirror and whistle for signalling.

k Be prepared to divert and carry a night-stop kit. **Don't** put pressure on yourself to get home if the weather deteriorates.

l Read AICs 126/1996 (Pink 131) 'Risks and Factors Associated with Operations on Runways Contaminated with Snow, Slush or Water' and 104/1998 (Pink 176) 'Frost, Ice and Snow on Aircraft'. These are orientated to larger

aircraft but do have useful information for General Aviation.

m When snow has fallen, check SNOWTAMS in the NOTAM series, if available, to find out if your proposed destination, and alternate(s), are open and which operational areas have been cleared. If there is an eight digit code at the end of a METAR, it shows that winter conditions affect that aerodrome. It may be easiest to telephone them. The first two digits, of the eight digit code, are the runway and the last two the braking action. See AIP, GEN para 3.5.10.13, page 3-5-30 for further details/decode. Know the effect that braking action described as, for example POOR, will have on the landing/abandoned take-off distance you need to have available. Bear in mind the effects of a crosswind combined with an icy runway.

4 PRE-FLIGHT

a There may be a greater risk of water condensation in aircraft fuel tanks in winter. Drain fluid from **all** water drains (there can be as many as five on some single-engined aircraft). Drain it into a clear container so that you can see any water.

b When refuelling, ensure the aircraft is properly earthed. The very low humidity on a crisp, cold day can be conducive to a build-up of static electricity.

c After flying high such that integral wing tank fuel has been 'cold soaked', and the ambient air is humid and cool, frost will form. If it is raining, almost invisible clear ice may form.

d Tests have shown that frost, ice or snow with the thickness and surface roughness of medium or coarse sandpaper, reduces lift by as much as 30% and increases drag by 40%. Even a small area can significantly affect the airflow, particularly on a laminar flow wing.

e Ensure that the entire aircraft is properly de-iced and check visually that **all** snow, ice and even frost, which can produce a severe loss of lift, is cleared. This includes difficult-to-see 'T' tails. If water has collected in a spinner or control surface and then frozen, this produces serious out-of-balance forces. **There is no such thing as a little ice.**

f The most effective equipment for testing for the presence of frost and ice are your eyes and your hands.



'remove all ice, frost and snow . . .'

g The best way to remove snow is by using a broom or brush. Frozen snow, ice and frost can be removed by using approved de-icing fluid in a pressure sprayer similar to a garden sprayer. An alternative is to melt the ice with hot water and then leather the aircraft dry to prevent re-freezing. Make sure that control surface hinges, vents etc are not contaminated. Use of a scraper might damage aircraft skins and transparencies.

h Do not rely on snow blowing off during the take off run. The 'clean aircraft concept' is the only way to fly safely – there should be nothing on the outside of the aircraft that does not belong there.

i Check that the pitot heater really is warming the pitot head – but don't burn your hand (use the back of it) or flatten the battery.

j Beware of wheel fairings jammed full of mud, snow and slush – particularly mud, as it is dense and doesn't melt (on one occasion 41 kg, nearly 100 lb, of mud was removed from the three wheel fairings of a 4 seat tourer). If the fairings are removed, there may be a loss of performance and removal may invalidate the aircraft's C of A. Check that retractable gear mechanisms are not contaminated. Also, remove mud from the under-side and leading edge of wings and tail plane; it seriously affects airflow.

k Water-soaked engine air intake filters can freeze and block the airflow.

l If hand-swinging a propeller, perhaps because of a flat battery, move the aircraft to a part of the airfield which isn't slippery. Don't try it unless you've been trained. Use chocks.

m During the engine run-up, check that use of carburettor heat gives a satisfactory drop in rpm or manifold pressure.

n Check any de-icing boots, particularly the tailplane for condition, holes etc. Wiping the boots with approved anti-icing fluid will enhance their resistance to ice build up.

5 DEPARTURE

- a Remember that taxiways and aerodrome obstructions may be hidden by snow, so ask, if you are not certain.
- b Check the cabin heater/demister operation as early as possible. Be prepared to use the DV window.
- c Taxi slowly to avoid throwing up snow and slush into wheel wells or onto the aircraft's surfaces. Taxying slowly is safer in case the tyres slide on an icy surface. Stop well clear of obstructions if there is any doubt about braking effectiveness.
- d Allow gyro instruments extra time to spin-up when they are cold.
- e You may consider using a 'Soft Field' take off technique – if so be sure that you are fully aware of recommended procedures.

6 EN ROUTE

- a After take-off on a slushy or snowy runway, select the gear UP-DOWN-UP. This may loosen accumulated slush before it freezes the gear in the up position.
- b Monitor VOLMET and turn back or divert early if the weather deteriorates. **Don't** wait until you are in a blinding snowstorm or covered in ice.
- c Carburettor icing is one of the worst enemies. The chart shows when it is most likely to occur. (See also *Leaflet No 14A – 'Piston Engine Icing'*.)
- d Carburettor ice forms stealthily, so monitor engine instruments for loss of rpm (fixed pitch propeller) or manifold pressure (constant speed propeller), which may mean carb ice is forming.

e Apply full carb heat periodically and **keep it on** long enough to be effective. The engine may run roughly for a short period while the ice melts.

f Use carb heat as an intermittent ON/OFF control – either full hot or full cold. Do not use full or partial carb heat continuously unless the Handbook/Flight Manual allow it.

- Use full carb heat for a time before a descent. During a descent, when using small throttle openings, apply full carb heat and increase rpm periodically to warm the engine.
- Remember carb heat increases fuel consumption.
- At low rpm, use full heat but if appropriate cancel it prior to touchdown in accordance with Manual/ Handbook instructions.

g If the aircraft has de-icing boots, it's a good idea to cycle the boots from time to time, even when ice is not expected. This prevents the valves in pneumatic systems from sticking.


h If you are flying just above clouds to stay clear of airframe icing, remember that the cloud tops will quickly rise as you fly:

- across high ground;
- towards a warm, cold or occluded front;
- towards a low pressure area.

If you fly into the top of clouds, the concentration of water droplets is often greatest near the cloud top and ice could build up quickly.

i Airframe Icing is most frequently encountered within convective clouds, Cumulus or Cumulonimbus (CU/CB) where the build up of ice can

CARB ICING

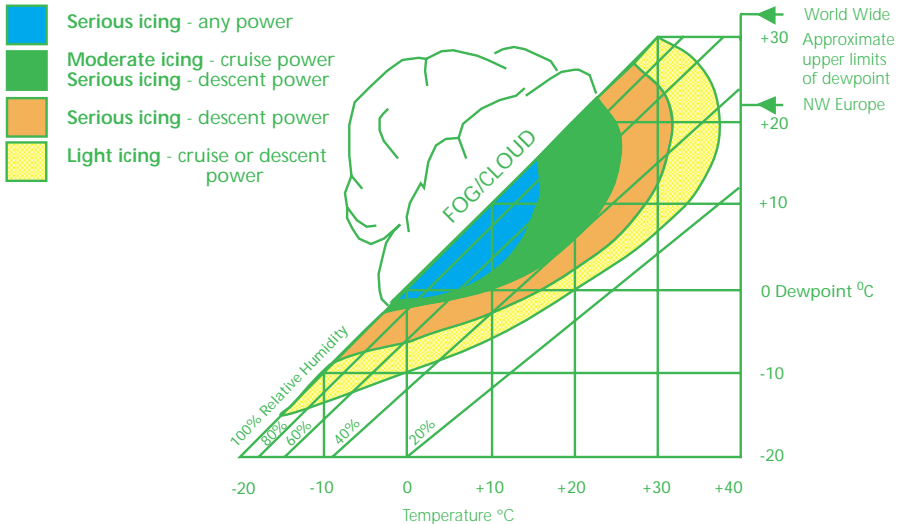

In the absence of dewpoint information assume high humidity when:

- the ground is wet (even dew)
- in precipitation or fog
- just below cloud base

be very rapid. In these clouds the icing layer can be several thousand feet thick and a dramatic change of altitude will be required to avoid icing. It is better to avoid flying through these clouds if you can, either by turning back or changing your route.

Icing can also occur in thin layered clouds, especially during the winter. During the autumn, winter and spring an extensive sheet of Stratocumulus (SC) may frequently form just below a temperature inversion, with the temperature in the cloud between 0 to -10°C. Such clouds may only be one to two thousand feet deep but within the cloud layer ice may build up quickly. This icing can be avoided by descending below the cloud, provided there is sufficient height available above the ground, or by

climbing above the cloud layer, but remember paragraph h.

j If you see ice forming anywhere on the aircraft, act promptly to get out of the conditions, don't wait until the aircraft is loaded with ice. Ice forms easiest on thin edges. As the tailplane generally has a smaller leading edge radius than the wing it means that if you can see it on the wing, the tailplane (or propeller blades) will already have a heavier load. Pilots have reported that ice builds up 3 to 6 times faster on the tailplane than the wing and up to double that on a windshield wiper arm. On some aircraft the tailplane cannot be seen from the cockpit. In fact the pencil like OAT probe is often the first place ice forms. If ice does form, keep the speed up; **Don't fly too slowly**. The stall speed will have increased.

The Manual/Handbook may give a minimum speed to cope with increased weight and drag due to ice build-up.

k The stall warning system may be iced up or otherwise affected. It is in any case designed and calibrated to provide indication of wing stall, not the tailplane!

l If you've got a big build-up of ice, the drag and weight are increasing while the climb performance is decreasing so you can't climb to get above it. High ground may prevent you from descending.

m Tell ATC so that others can be warned.

n Most of the time snow, which is already frozen, will not stick to an aircraft, but occasionally wet snow with a high moisture content will stick. Treat it like ice.


o Freezing rain can occur during the winter months either at or near the ground, or in a layer above the ground. It occurs when warm moist air is moving into a cold region. The invading warm moist air may cause a layer of air, where the temperature is

higher than zero°C, to overrun a much colder layer beneath where the temperatures are below zero°C.

Under these conditions precipitation forming in the high cloud layers will melt to form rain as it falls through the warm air which will then fall into the sub-freezing layer beneath. This rain will quickly freeze again in the cold air forming a solid layer of clear ice over everything. This clear ice will build up very quickly and be difficult to 'shake off'.

p Freezing rain is the most severe form of airframe icing. It can be encountered in flight up to altitudes of 10 000 feet, or it may be encountered on the ground or when flying close to the ground. Aircraft parked outside will be quickly coated with a layer of clear ice, and similarly aircraft in flight. If such conditions are encountered in flight near the ground it is best to land as soon as possible, or if the severe icing is encountered at a higher altitude descend, if possible, into a warmer layer below.

q If you are in trouble, tell someone clearly and in good time and make sure the transponder is ON and set to

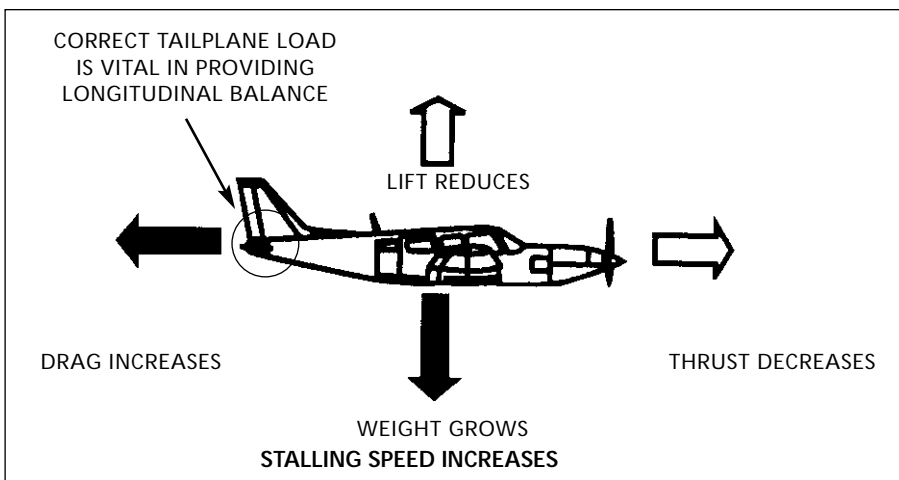

code 7700. The Emergency Services can receive a transponder return much better than the primary radar return.

r Ice forming on an aircraft can cause odd vibrations and noises. An aerial iced up may begin to vibrate (and can fall off). Don't panic, remember **AVIATE, NAVIGATE, COMMUNICATE**.

s Monitor any autopilot, it may have been surreptitiously altering the trim to compensate, possibly, for the effect of an ice build-up.

7 LANDING

a If on arrival you descend with an iced up aeroplane and windshield and cannot see, use the DV window.

b Most icing accidents occur when the pilot loses control during approach or landing. Even a thin coat of ice on the aircraft justifies a 20% increase in approach speed. It will extend the landing run – perhaps on a slippery runway. The handling may be different, don't make large or abrupt changes in power or flap settings.

c If you suspect, because of changed stick forces or vibration, that there is ice on the tailplane, a flapless or partial flap landing may be advisable (the handbook/manual give flapless-approach speeds). This reduces the tailplane load and the likelihood of tailplane stall, which can result in a **VERY** severe pitch down. Recovery is by **REDUCING THE FLAP** angle and by pulling hard – over 50 kg (110 lbs) may be necessary.

d Another unpleasant surprise due to tailplane ice could be when the aircraft is being flown on autopilot, which has been slowly and silently re-trimming nose-up and reaches the limit. When the flaps are lowered,

the autopilot could disconnect and it may require 4 strong arms to recover. Again, go for the flap selector.

e When landing on a very wet or icy runway, particularly in a crosswind, the aircraft may aquaplane or slide and directional control can be lost. In such circumstances an alternate runway or diversion is necessary. Aircraft with castoring nosewheels may be more vulnerable.

f Remember that ground temperatures fall quickly during the late afternoon on an exposed airfield and by dusk ice may be forming on any wet runways. The ice may form as a clear sheet which is invisible and has a coefficient of friction of zero!

g Helicopter pilots should beware of 'white-out' due to blowing snow when hovering. (See *Safety Sense Leaflet No. 17B 'Helicopter Airmanship'*.)

8 AFTER FLIGHT

a Take care when getting out of the aircraft. Jumping from the aircraft walkway onto an icy apron could lead to a painful tumble.

b If parked outside, use control locks and proper tie-downs to guard against winter gales. Face into the prevailing or forecast wind. Put proper pitot and static covers on – make sure the pitot has cooled down!

c If it is muddy or slushy, inspect wheel fairings, landing gear bays, flaps and tailplane for loose mud or slush. They are easier to remove when soft than when frozen.

d Notify Air Traffic if the actual weather was different, or worse, than forecasted. It might be important for other pilots to know.

9 SUMMARY

- ✗ Stay out of icing conditions for which the aircraft has NOT been cleared.
- ✓ Note freezing level in the aviation weather forecast. Don't go unless the aircraft is equipped for the conditions.
- ✓ Have warm clothing available for pre-flight and in case of heater failure or forced landing.
- ✗ Mud, snow and slush will lengthen take off and landing runs. Work out your distances.
- ✓ Remove all frost, ice and snow from the aircraft – there is no such thing as a little ice.
- ✓ Check carefully that all essential electrical services, especially pitot heat, are working properly.
- ✓ Check that the heater/demister are effective. Watch out for any signs of carbon monoxide poisoning.
- ✓ Be extra vigilant for carb ice.
- ✓ If ice does start to form, act promptly, get out of the conditions by descending (beware of high ground), climbing or diverting.
- ✓ If you encounter ice, tell ATC so that others can be warned.
- ✓ During the approach if you suspect tailplane ice, or suffer a severe pitch down, RETRACT THE FLAPS.
- ✓ If you have to land with an iced up aeroplane, add at least 20% to the approach speed.
- ✓ Snow covered, icy or muddy runways will make the landing run much longer and crosswinds harder to handle.

THERE IS NO SUCH THING AS A LITTLE ICE

Other leaflets in this series:

- 1C *Good Airmanship Guide*
- 2B *Care of Passengers*
- 5D *VFR Navigation*
- 6C *Aerodrome Sense*
- 7B *Aeroplane Performance*
- 8D *Air Traffic Services Outside Controlled Airspace*
- 9A *Weight and Balance*
- 10A *Bird Avoidance*
- 11 *Interception Procedures*
- 12C *Strip Sense*
- 13A *Collision Avoidance*
- 14A *Piston Engine Icing*
- 15B *Wake Vortex*
- 16A *Balloon Airmanship Guide*
- 17B *Helicopter Airmanship*
- 18A *Military Low Flying*
- 19 *Aerobatics*
- 20A *VFR Flight Plans*
- 21A *Ditching*
- 22 *Radiotelephony*
- 23 *Pilots – it's your Decision*
- 24 *Pilot Health*

New leaflets will appear from time to time on a non-regular basis.

There is no restriction on photo-copying and extracts can be published provided the source is acknowledged.

This leaflet does not supersede or replace any formal documents.

If clubs, organisations or individuals wish to receive further copies, please write to Westward documedia Limited, 37 Windsor Street, Cheltenham, Glos GL52 2DG. Fax. No. 01242 584139. Telephone 01242 235151.

Suggestions and technical queries to SRG Safety Promotion Section, Aviation House, Gatwick Airport, West Sussex RH6 0YR. Telephone 01293 573225/7.

ISSN 0266-1519

© Civil Aviation Authority 2000

Prepared by the Safety Promotion Section and the Corporate Communications Department of the Civil Aviation Authority.